
RFID LABEL WT001



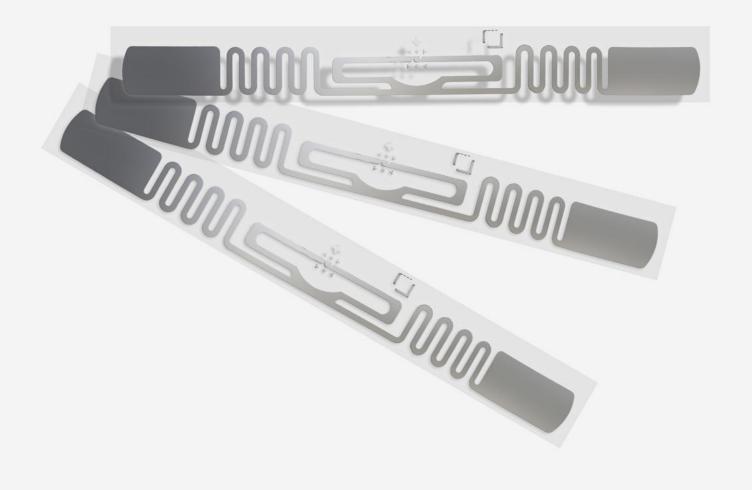

WT001 is a *wet inlay* made of PET, a flexible, cut- and weather-resistant thermoplastic material.

Rectangular in shape, it measures 100 mm x 12 mm x 0.10 mm and

can be applied to **non-metal surfaces** by means of an adhesive backing. Transparent in colour, it is available in **UHF with the HIGGS 3 chip.**.

MARKETS

WT001 is used for supply-chain management in retail, as well as in industry, logistics and waste collection.

RFID LABEL WT001





European frequency (EU) 868 MHz - US frequency 920 MHz

RFID features		
Chip	Memory	ISO Standard
HIGGS 3	64 bytes - TID: 8 bytes - EPC: 60 bytes	ISO 18000-6C / EPC Class 1 Gen 2
HIGGS 3 US	64 bytes - TID: 8 bytes - EPC: 60 bytes	ISO 18000-6C / EPC Class 1 Gen 2

Technical specifications		
Application	Non-metal surfaces	
Dimensions	100 x 12 x 0.10 mm	
Material	PET	
Weight	0.5 g	
Application method	Adhesive	

Customisation	
Colour	Transparent

