


LB006

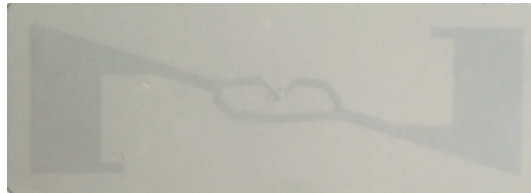

UHF

IP 65

DESCRIPTION

LB006 is a flexible label in "PP label", ideal for asset management, for the traceability of transport systems in Logistics, for access control and vehicle inventory, for the identification of automation processes and for anti-counterfeiting.

Available in UHF, it can be read up to a distance of 10 m and resists to high temperatures.

RFID FEATURES

Frequency	865 - 868 MHz
Chip	
IC type	Alien Higgs-3
Memory	
EPC	96 Bits
User	512 Bits
Unique TID	64 Bits
Standard protocol	ISO 18000-6C & EPC global Class 1 Gen 2
Reading distance	Up to 10 m (dependent upon the reader)

PHISICAL FEATURES

Size (mm)	110x40
Weight (g)	0.11
Material housing	PP label
Attachment	Adhesive

ENVIRONMENTAL FEATURES

Temperature	
Operating	-40°C to +100°C
Storage	-20°C to +80°C

CUSTOMIZATION

Printing	Offset
-----------------	--------